

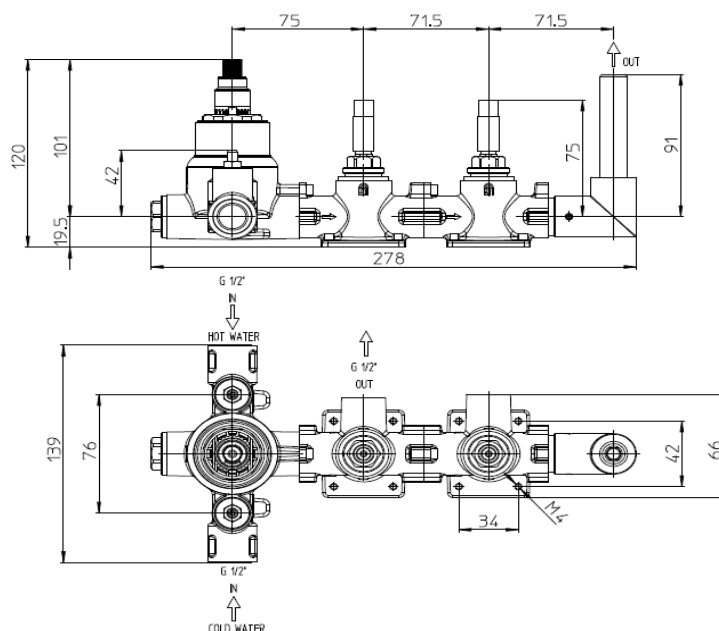
Codice - Code:
Z00135

Concealed part 2 ways thermostatic mixer with connection for water supply elbow

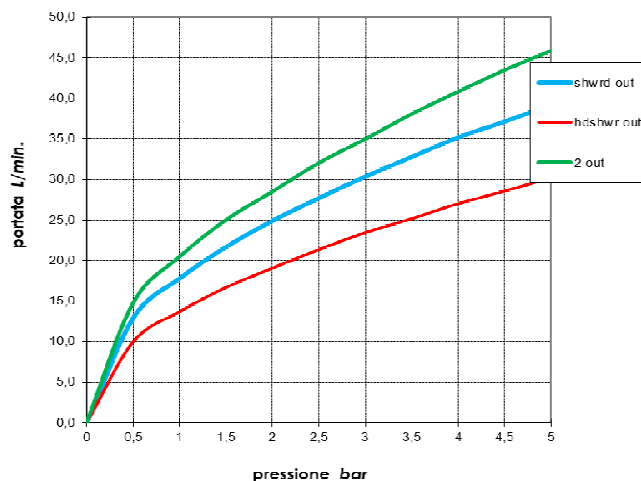
Descrizione - Description:

Parti incasso miscelatore termostatico Tess 2 vie, con connessione per presa acqua a gomito, attacchi da 1/2" - Ottone grezzo

Concealed parts for thermostatic mixer Tess 2 ways, with connection for water supply elbow, 1/2" connections - Raw brass
Unterputz-Einbaukörper für Thermostat Brausebatterie Tess 2 Wege, mit Verbindung für Anschlussbogen, 1/2" iG Anschlüsse - Rohmessing
Tecnologia - Technology:
Parties à encastrer pour mitigeur thermostatique Tess 2 voies, avec connexion pour prise d'eau à coude, connexions 1/2" - Laiton Brut
Partes empotradas para mezclador termostático Tess 2 vías, con conexión por toma de agua - Conexiones 1/2" - Latón Bruto
Встраиваемые части термостатического смесителя Tess 2 выхода, с подключением к водоснабжению, соединение на 1/2" - Латунь неочищенная
Immagine Prodotto - Product Image

Disegni - Drawings

Grafico di portata - Flow rate diagram

	shwrd out	hdshwr out	2 out
0	0,0	0,0	0,0
0,5	12,9	10,0	14,8
1	17,8	13,7	20,5
1,5	21,7	16,7	25,0
2	24,9	19,1	28,5
2,5	27,7	21,4	32,1
3	30,3	23,4	35,0
3,5	32,8	25,2	38,1
4	35,2	27,0	40,9
4,5	37,1	28,6	43,5
5	39,2	30,2	45,9
pressione bar	portata L/min		



Caratteristiche idrauliche - Hydraulic features

	Pressione Pressure	Portata Flow rate	Solo per miscelatori termostatici Only for thermostatic mixers	
min	1 bar	14 L/min	Blocco di sicurezza Safety lock	38° C
max	5 bar	46 L/min	Temperatura acqua fredda Cold water temperature	≤ 20°C
Portata minima consigliata per buon funzionamento Recommended minimum flow-rate for optimal performance		--	Temperatura acqua calda Hot water temperature	55°÷65°C

Materiali - Materials

Certificazioni - Certifications

Conformità' - Conformity