


CONO WALL-HUNG WASHBASIN

- washbasin with premium character exudes elegance and harmony
- optimally integrated enamelled waste accentuates the underlying geometry of the washbasin
- unusually generous rim provides space for fittings or individual accessories
- perfectly complements the CONO range



Similar illustrations

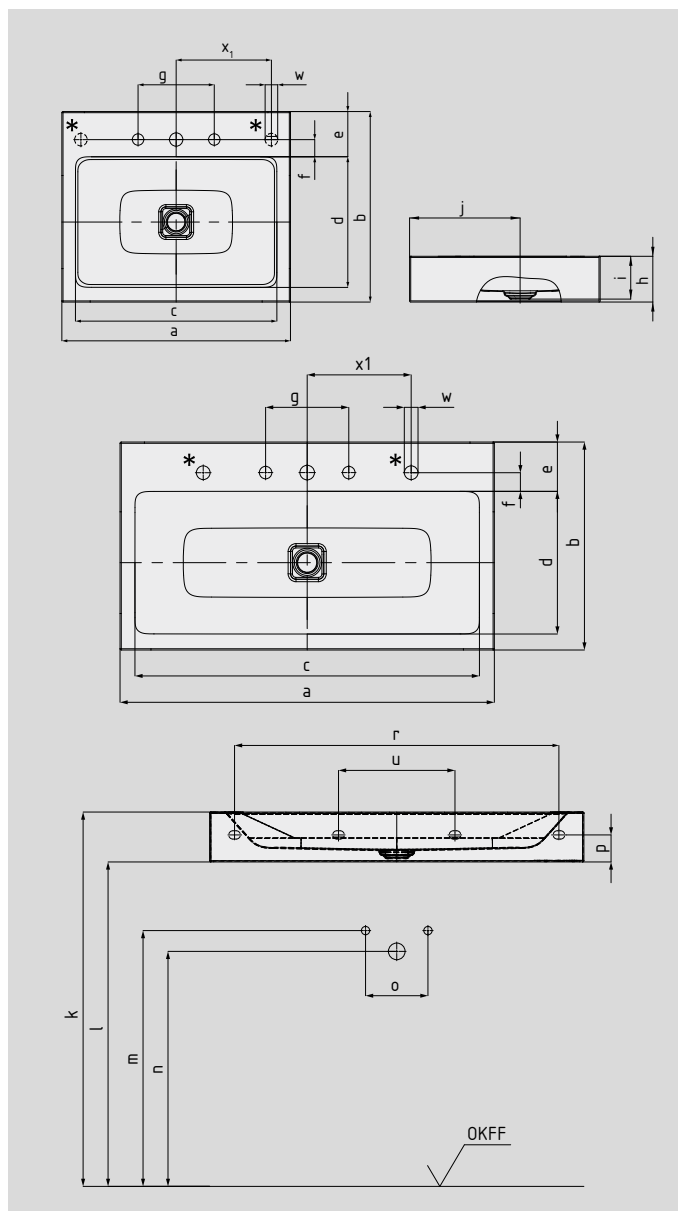

* Control knob holes for CLOU waste and overflow system with cable operated pop-up waste and deck mounted control knob

Model No.		3089	3090	3091
External length	a	600	900	1200 mm
External width	b	500	500	500 mm
Internal length	c	532	832	1128 mm
Internal width	d	348	348	343 mm
Depth of tap deck	e	116	116	116 mm
Distance tap holes to edge	f	45	45	45 mm
Distance of tap holes	g	200	200	200 mm
Height of rim	h	120	120	120 mm
Distance basin surface to bottom edge of waste hole	i	112	112	112 mm
Distance rear edge to centre of waste hole	j	290	290	290 mm
Distance FF*1 to top edge of basin surface	k	820-850	820-850	820-850 mm
Distance FF*1 to bottom edge (washbasin)	l	700-730	700-730	700-730 mm
Distance FF*1 to centre of water inlet	m	570-600	570-600	570-600 mm
Distance FF*1 to centre of drain hole wall connection	n	520-580	520-580	520-580 mm
Distance hot/cold water inlet	o	80-150	80-150	80-150 mm
Distance bottom edge to centre of fixing hole	p	65	65	65 mm
Outer distance of fixing holes*2	r		780	1040 mm
Inner distance of fixing holes*2	u	280	280	280 mm
Distance of tap holes	v	-	-	600 mm
Diameter of control knob hole	w	33	33	33 mm
Distance of tap hole to centre of control knob hole	x1	250	275	mm
Distance from centre of control knob hole to outer edge	x2			600 mm
Weight of the enamelled washbasin in kg		15,0	19,7	24,8

*1 Finished floor level.

*2 Check the recommended number of fixing holes before purchasing the fittings (varies depending on size of washbasin). Subject to technical alterations, tolerances and errors. Similar illustrations.

KALDEWEI